
AIP HONG KONG 23 JAN 25

STANDARD DEPARTURE CHART-INSTRUMENT (SID) - ICAO

Transition Altitude 9 000 ft
Hong Kong Tower 118.2
Hong Kong Departure 123.8

HONG KONG / Intl (VHHH) RNAV (GNSS) DALOL 1D SID RWY 25C

- 1. In the event that PBN performance ceases to comply with the requirements for RNP 1 after departure, pilots must notify ATC as soon as possible. ATC assistance would be provided as necessary.
- 2. Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. These flights shall fly the contingency procedures as detailed in VHHH AD 2.22 para 2.2.3.5.

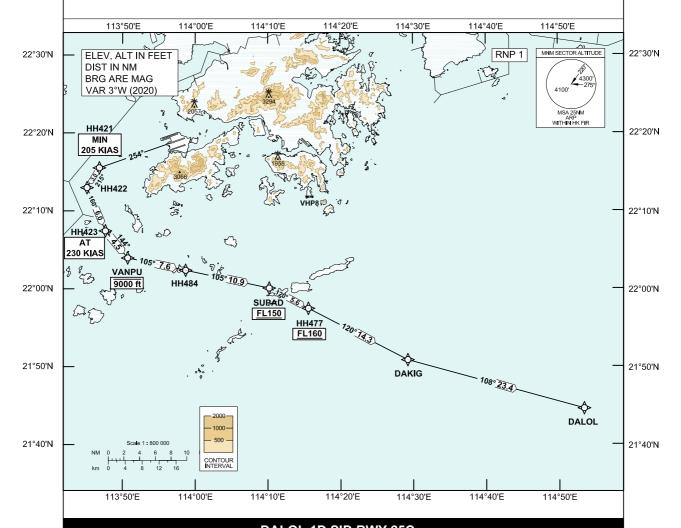

DALOL 1D SID RWY 25C

CLIMB REQUIREMENT

Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

TERRAIN CLEARANCE

Minimum climb gradient of 3.3% (201 ft/NM).

SPEED RESTRICTION

Speed restriction of 205 KIAS or greater at HH421 and 230 KIAS until HH423.

CHANGE: New procedure

AD 2-VHHH-SID-DALOL-D V01 240513

FMC Database Coding Reference for Hong Kong RNAV_(GNSS) SID

TABULAR DESCRIPTION: DALOL 1D RWY 25C

Serial Number	Path Descriptor	Waypoint Identifier	Fly- over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH421	1	254 (251)	+3.0	-	-	-	+205	RNP 1
02	TF	HH422	-	215 (212)	+3.0	3.0	-	-	-	RNP 1
03	TF	HH423	-	160 (157)	+3.0	6.0	-	-	@230	RNP 1
04	TF	VANPU	Ī	144 (141)	+3.0	4.5	ı	-9000	T.	RNP 1
05	TF	HH484	1	105 (102)	+3.0	7.6	-	-	-	RNP 1
06	TF	SUPAD	-	105 (102)	+3.0	10.9	-	+FL150	-	RNP 1
07	TF	HH477	-	120 (117)	+3.0	5.6	-	+FL160	-	RNP 1
08	TF	DAKIG	ī	120 (117)	+3.0	14.3	-	-	-	RNP 1
09	TF	DALOL	-	108 (105)	+3.0	23.4	-	-	=)	RNP 1

WAYPOINT LIST

DALOL 1D RWY 25C									
Waypoint Identifier	Coordinates (WGS-84)								
HH421	22 15 31.13N	113 44 09.41E							
HH422	22 12 58.53N	113 42 27.41E							
HH423	22 07 26.10N	113 44 59.40E							
VANPU	22 03 57.95N	113 48 03.85E							
HH484	22 02 23.21N	113 56 01.92E							
SUPAD	22 00 05.99N	114 07 30.72E							
HH477	21 57 29.80N	114 12 54.07E							
DAKIG	21 50 52.90N	114 26 33.33E							
DALOL	21 44 36.90N	114 50 45.34E							